



Lazer Star Lights • 2734 Danley Court, Paso Robles, CA • 805.226.8200 • [lazerstarlights.com](http://lazerstarlights.com)

Part # 576306


## Dodge Ram 2500 Bumper Bracket Instructions

### **GENERAL NOTES:**

- \* These instructions are also available on our website: [lazerstarlights.com](http://lazerstarlights.com). Please check our website before you begin installation for any updated instructions as well as additional photos for your reference.

### **PARTS LIST:**

- \* (2) Large Fabricated Bracket
- \* (2) L Shaped Fabricated Bracket
- \* (6) M6 x 14mm Button Head Screw
- \* (6) M6 Flat Washer
- \* (6) M6 Nyloc Nut

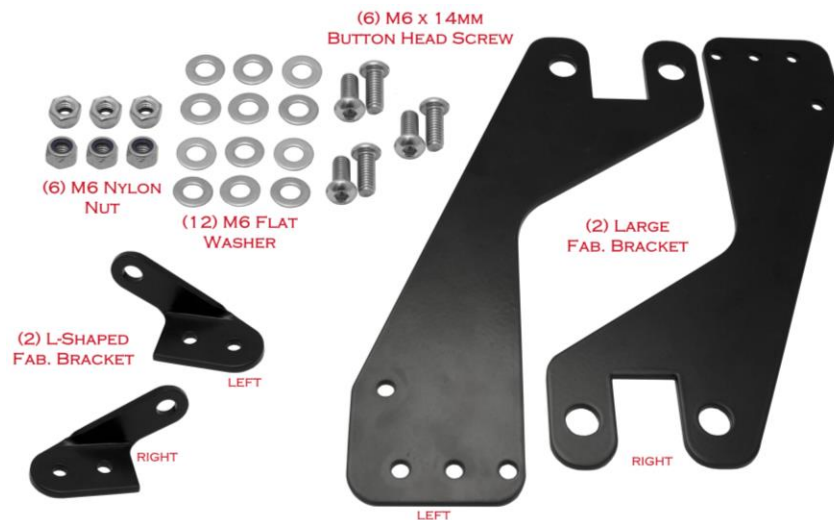


### **PARTS / TOOLS NEEDED TO COMPLETE INSTALLATION:**

- \* 10mm Wrench
- \* 4mm Allen Wrench


APPROXIMATE INSTALL TIME: 30 min – 1 hr

## **INSTALLATION:**

1. Bolt the *left* L Shaped Fabricated Bracket to the *left* Large Fabricated Bracket using the M6 button head screws, washers, and nut.
  - If installing a Dominator LED light bar, use the lower two holes – Image 1
  - If installing a LX LED light bar, use the upper two holes – Image 2

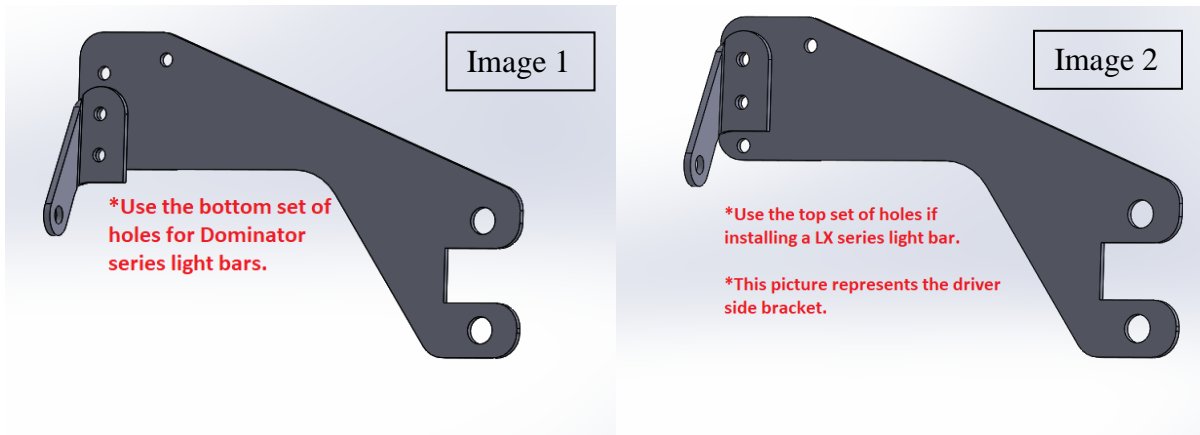

2. Repeat Step 1 for the *right* L Shaped Fabricated Bracket and the *right* Large Fabricated Bracket.

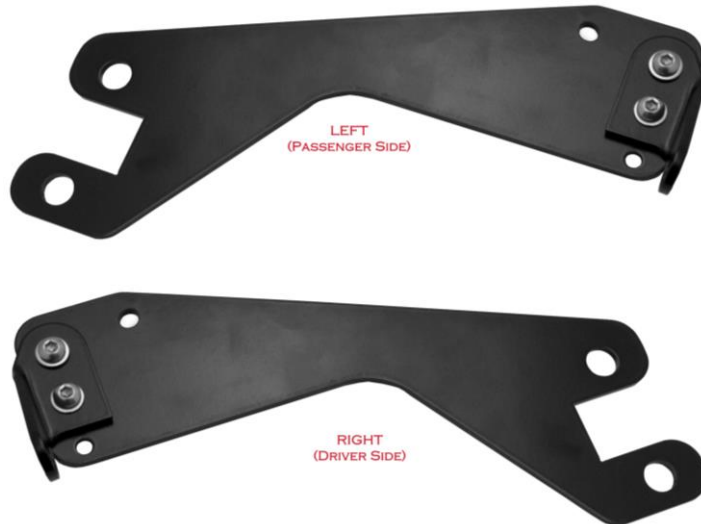

3. Transitioning attention to the front bumper, remove the pre-existing inside 2 bolts from the tow hooks.
4. Using the 4 pre-existing tow hook bolts removed in Step 3, bolt the large fabricated bracket onto the tow hook. Repeat on both sides.



5. Use a supplied M6 button head screw and bolt the large fabricated bracket to the metal support. Repeat on both sides.



6. Install the bottom mount to the light bar. You will **not** use the supplied light bar “Saddle Bracket”.
  - See image below for the mounting the Dominator LED series light bars
  - See image below for mounting the LX LED series light bars



7. Be sure to set the width of the bottom mounts (measuring from outside of the mounts) to the same width as the installed L-Shaped Fab. Brackets.
8. Loosely mount the light bar upside down to the L-Shaped Fab. Brackets, so the light bar mounting brackets are to the top side.
9. Aim the light.
10. Once light is aimed at desired angle, tighten all the bolts.

Installation is Complete

Lazer Star Lights  
2734 Danley Court, Paso Robles CA 93446 • 805.226.8200  
[lazerstarlights.com](http://lazerstarlights.com)

Use and Care Tips:

- \* Keep away from hot or moving parts.
- \* Regularly check for loose hardware.
- \* Keep any unused parts for possible future use.

## Installation is Complete

