

Lazer Star Lights • 2734 Danley Court, Paso Robles, CA • 805.226.8200 • lazerstarlights.com

Part # 576306 Dodge Ram 2500 Bumper Bracket Instructions

GENERAL NOTES:

* These instructions are also available on our website: lazerstarlights.com. Please check our website before you begin installation for any updated instructions as well as additional photos for your reference.

PARTS LIST:

- * (2) Large Fabricated Bracket
- ✗ (2) L Shaped Fabricated Bracket
- ✗ (6) M6 x 14mm Button Head Screw
- ✗ (12) M6 Flat Washer
- ✗ (6) M6 Nyloc Nut



PARTS / TOOLS NEEDED TO COMPLETE INSTALLATION:

и 10mm Wrench

ит Allen Wrench


APPROXIMATE INSTALL TIME: 30 min - 1 hr

Page **1** of **4** Dodge Ram 2500 Bumper Bracket Installation Instructions (PN: 576306)

Lazer Star Lights 2734 Danley Court, Paso Robles CA 93446 • 805.226.8200 lazerstarlights.com

INSTALLATION:

- 1. Bolt the *left* L Shaped Fabricated Bracket to the *left* Large Fabricated Bracket using the M6 button head screws, washers, and nut.
 - If installing a Dominator LED light bar, use the lower two holes Image 1
 - If installing a LX LED light bar, use the upper two holes Image 2

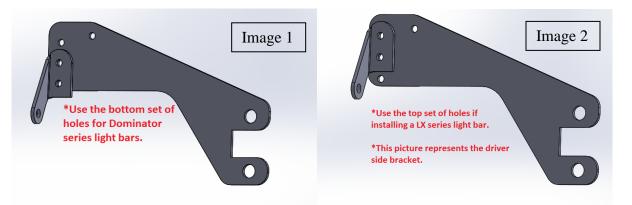

2. Repeat Step 1 for the *right* L Shaped Fabricated Bracket and the *right* Large Fabricated Bracket.



- 3. Transitioning attention to the front bumper, remove the pre-existing inside 2 bolts from the tow hooks.
- 4. Using the 4 pre-existing tow hook bolts removed in Step 3, bolt the large fabricated bracket onto the tow hook. Repeat on both sides.



Page **2** of **4** Dodge Ram 2500 Bumper Bracket Installation Instructions (PN: 576306)

Lazer Star Lights 2734 Danley Court, Paso Robles CA 93446 • 805.226.8200 <u>lazerstarlights.com</u>

5. Use a supplied M6 button head screw and bolt the large fabricated bracket to the metal support. Repeat on both sides.



- 6. Install the bottom mount to the light bar. You will **not** use the supplied light bar "Saddle Bracket".
 - See image below for the mounting the Dominator LED series light bars
 - See image below for mounting the LX LED series light bars



- 7. Be sure to set the width of the bottom mounts (measuring from outside of the mounts) to the same width as the installed L-Shaped Fab. Brackets.
- 8. Loosely mount the light bar upside down to the L-Shaped Fab. Brackets, so the light bar mounting brackets are to the top side.
- 9. Aim the light.
- 10. Once light is aimed at desired angle, tighten all the bolts.

Installation is Complete

Lazer Star Lights 2734 Danley Court, Paso Robles CA 93446 • 805.226.8200 <u>lazerstarlights.com</u>

Use and Care Tips:

- \star Keep away from hot or moving parts.
- * Regularly check for loose hardware.
- * Keep any unused parts for possible future use.

Installation is Complete

